

Tilly assembly instructions





Table of contents

Safety instructions	3
Light features	4
Freestanding base installation	5
Clamp mount installation	6
Surface mount installation	7

Important safety instructions

When using an electrical furnishing, basic precautions should always be followed, including the following:

This furnishing is made for commercial use only.

Read all instructions before using this furnishing:

DANGER

To reduce the risk of electrical shock:

1. Always unplug this furnishing from the electrical outlet before cleaning.

WARNING

To reduce the risk of burns, fire, electric shock, or injury to persons:

1. Unplug from outlet before putting on or taking off parts.
2. Close supervision is necessary when this furnishing is used by, or near children, invalids, or disabled persons.
3. Use the furnishing only for its intended use as described in these instructions.
Do not use attachments not recommended by the manufacturer.
4. Never operate this furnishing if it has a damaged cord or plug, if it is not working properly, if it has been dropped or damaged, or dropped in water. Return the furnishing to a service center for examination and repair.
5. Keep the cord away from heated surfaces.
6. Do not use outdoors.
7. Use only SJT 18 AWG cord.
8. Risk of injury. Maximum load 75 pounds.

To reduce the risk of electric shock, this furnishing has a polarized plug (one blade is wider than the other). This plug will fit in a polarized outlet only one way. If the plug does not fit fully in the outlet, reverse the plug. If it still does not fit, contact a qualified electrician to install the proper outlet. Do not change the plug in any way.

Note – servicing is only to be performed by an authorized representative.

Servicing of double-insulated products

In a double-insulated product, two systems of insulation are provided instead of grounding. No grounding means is provided on a double-insulated product, nor is a means for grounding to be added to the product. Servicing a double-insulated product requires extreme care and knowledge of the system, and is to be done only by qualified service personnel. Replacement parts for a double-insulated product must be identical to the parts they replace. A double-insulated product is marked with the words “DOUBLE INSULATION” OR “DOUBLE INSULATED”. The symbol (square within a square) is also able to be marked on the product.

Save these instructions

Light features

Occupancy sensor

The under-head integrated Passive Infrared (PIR) occupancy sensor automatically turns the fixture off after 30 minutes of no detection. Coverage: 360° lens view, 90° outward detection angle, coverage of 30° diameter at 15" distance.

Auto turn-off

The standard version with no occupancy sensor will automatically turn off after 10 hours (+/- 15 minutes).

Touch-and-hold dimming

Any level of output can be achieved to fit user preferences, from 100% to 15% light output, with a touch and hold of the finger on the slightly raised touch-sensitive button under the head. When desired level is reached, release the button. On/off is toggled with a single touch.

USB port (available on freestanding base only)

Charging available with optional Type-A connector (5V, 1.2A) USB port built in to the base for charging your mobile devices (**Figure A**). Insert your USB cable into the port, and power is available.

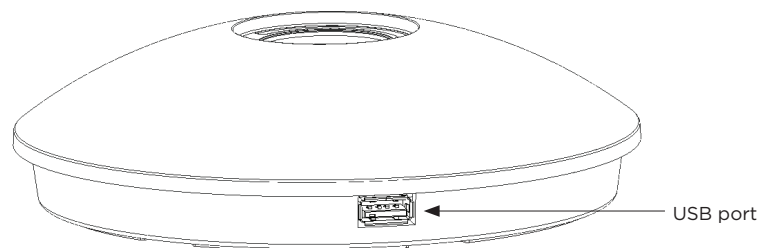


Figure A

Freestanding base

Assembly:

1. Remove fixture from packaging.
2. Stand fixture upright.
3. Connect silver quick-connect cord to power supply. (**Figure A**)

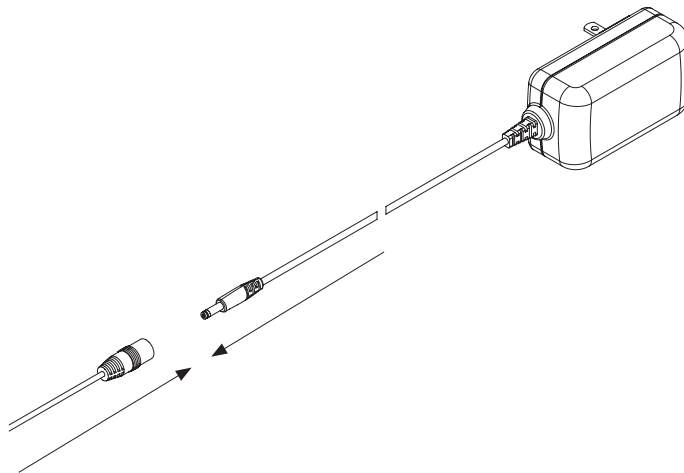


Figure A

Clamp mount

Assembly:

1. Turn the adjustment screw out to allow for a space larger than the thickness of the work surface.
2. Position the clamp bracket onto the work surface in the desired location and tighten the adjustment screw. Make sure there is a gap between the back edge of the surface and the wall or panel of approximately $\frac{1}{2}$ " to allow for the power plug connector to pass through. (Figure A)
3. Connect silver quick-connect cord to power supply. (Figure B)

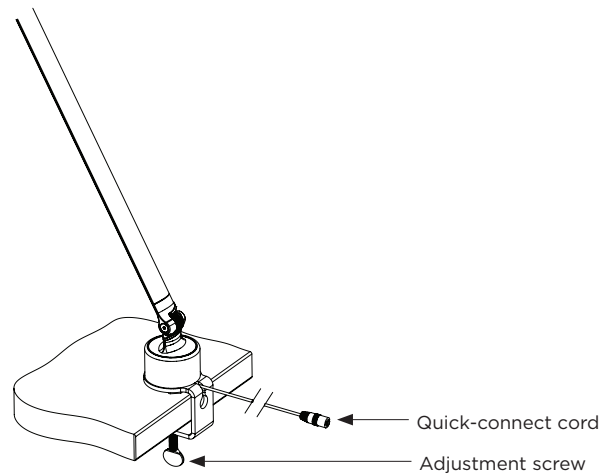


Figure A

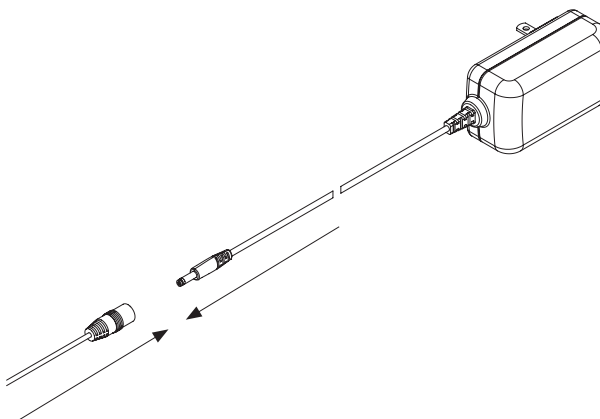


Figure B

Surface mount

Tools required:

2-1/8" Diameter hole saw
Phillips head screwdriver

Assembly:

1. Drill a 2-1/8" hole in the work surface.
2. Install surface mount base in hole, ensuring anti-rotation stop is located appropriately for the intended orientation.
3. The surface mount base will be pre-attached to the light fixture, so the limits of the base rotation can be determined by rotating the base by hand (**Figure A**)
4. Feed the fixture's power cord through the holes in surface mount and work surface.
5. Fasten the surface mount bracket using a Phillips head screwdriver by loosely installing the 3 screws provided through the lower washer in the bottom of the surface mount bracket.
6. Before fully tightening the lower screws, ensure that the light rotates over the desired area.
7. Connect silver quick-connect cord to power supply. (**Figure B**)

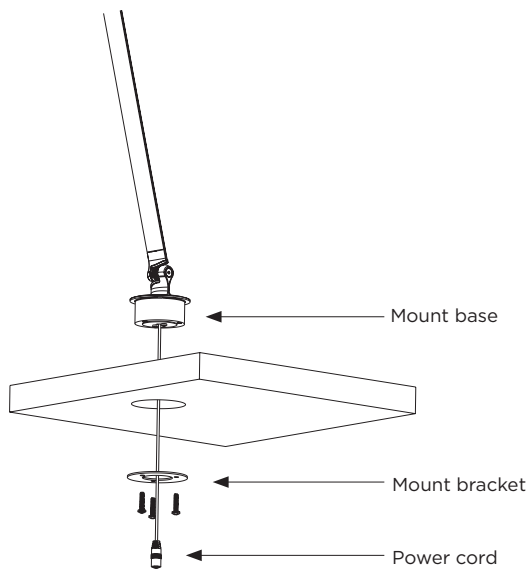


Figure A

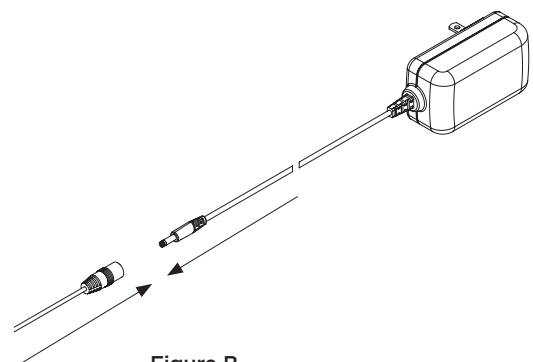


Figure B