

Staks benching building blocks





Table of contents

Static benching

Worksurfaces/worksurface extension	3
Single sided toolrails, ¼" panels	4
Single sided toolrails, 1" panels	5
Double sided toolrails, ¼" panels	6
Double sided toolrails, 1" panels	7
Tri and quad toolrails/worksurfaces	8
Supports	9
Toolrail privacy panels	10
Toolrail storage	11
Worksurface storage	12
End storage	13
Brackets/toolrail infill	14
Floor storage	15
Power kits, 3 circuit/5 wire	16
Power kits, 4 circuit/8 wire	17
Chicago power	18
Wire management	19

Height adjustable benching

Worksurfaces	20
Storage bases	20
Panel/cabinet bases	21
Cross rails	22
Floor storage	23
Floor storage cushions	24
Privacy screens/brackets	25-26
Wire management	27

Electrical components

3 circuit/5 wire	28
4 circuit/8 wire	29

Static Worksurfaces

- Surface widths: 48"w, 54"w, 60"w, 66"w, 72"w, 78"w, 84"w
- Depths: 22"d, 30"d, 36"d
- Optional grommets can be specified in any combination of left, right and center
- Use 22"d worksurfaces with 48"w metal H leg end support
- Use 30"d worksurfaces with 48"w or 64"w metal H leg end support
- Use 36"d worksurfaces with 64"w metal H leg end support
- Long grain direction



[6-MCT-72/22](#) - 22"d worksurfaces (shown)
[6-MCT-72/30](#) - 30"d worksurfaces
[6-MCT-72/36](#) - 36"d worksurfaces



Plan view - optional grommet locations

Static Worksurface extension

- Widths: 48.125"w, 64.125"w
- 48"w extension must be used with 48"w leg
- 64"w extension must be used with 64"w leg
- Attaches to rectangular worksurface with ECBKT4 bracket (one set per top)
- Long grain direction



48"w
[6-4814ET](#)



64"w
[6-6414ET](#)

Static Single sided toolrails, for ¼" thick privacy panels

Toolrails

- Use with ¼" thick acrylic privacy panels. **Note:** Not to be used with shared organizers
- Clear anodized aluminum
- End cap on ends, set of two
- Toolrails available in sets of two, three, or four to accommodate four, six, or eight users
- Toolrail/user widths: 48"w, 54"w, 60"w, 66"w, 72"w, 78"w, 84"w. Refer to Specify & price for overall toolrail widths

Modesty panels

- Required for single sided tool rails
- Widths: 46"w, 52"w, 58"w, 64"w, 70"W, 76"w, 84"w. **Note:** Modesty panel is 2" shorter than toolrail length
- Available as laminate or veneer
- TFL is horizontal grain, veneer is vertical grain

Modesty panel

shown with 18"h acrylic privacy panel



[6-1246KMP](#) TFL (shown)
[6-1246WMP](#) Veneer

Toolrails



4 users
[6-S96TRKA2](#) shown



6 users
[6-S144TRKA3](#) shown



8 users
[6-S192TRKA4](#) shown

Static Single sided toolrails, for 1" thick privacy panels

Toolrails

- Use with 1" thick TFL, dry erase laminate, veneer, or fabric privacy panels. **Note:** Not to be used with shared organizers
- Clear anodized aluminum
- End cap on ends, set of two
- Toolrails available in sets of two, three, or four to accommodate two, three, or four users
- Toolrail/user widths: 48"w, 54"w, 60"w, 66"w, 72"w, 78"w, 84"w. Refer to Specify & price for overall toolrail widths

Modesty panels

- Required for single sided tool rails
- Widths: 46"w, 52"w, 58"w, 64"w, 70"W, 76"w, 84"w. **Note:** Modesty panel is 2" shorter than toolrail length
- Available as laminate or veneer
- TFL is horizontal grain, veneer is vertical grain

Modesty panel

shown with 18"h laminate privacy panel



[6-1246KMP](#) TFL (shown)
[6-1246WMP](#) Veneer



4 users
[6-S96TRKB2](#) shown



6 users
[6-S144TRKB3](#) shown



8 users
[6-S192TRKB4](#) shown

Static Double sided toolrails, for ¼" thick privacy panels

- Use with ¼" thick acrylic privacy panels. **Note:** Not for use with shared organizers, see additional toolrail styles
- Clear anodized aluminum
- End cap on ends, set of two
- Toolrails available in sets of two, three, or four to accommodate four, six, or eight users
- Toolrail/user widths: 48"w, 54"w, 60"w, 66"w, 72"w, 78"w, 84"w. Refer to Specify & Price for overall toolrail widths



Reference image with 18"h acrylic privacy panels



4 users
[6-A96TRKA2](#) shown



6 users
[6-A144TRKA3](#) shown



8 users
[6-A192TRKA4](#) shown

Static Double sided toolrails, for 1" thick privacy panels

- Use with 1" thick TFL, dry erase laminate, veneer, or fabric privacy panels. **Note:** Not for use with shared organizers, see additional toolrail styles
- Clear anodized aluminum
- End cap on ends, set of two
- Toolrails available in sets of two, three, or four to accommodate four, six, or eight users
- Toolrail/user widths: 48"w, 54"w, 60"w, 66"w, 72"w, 78"w, 84"w. Refer to Specify & price for overall toolrail widths



Reference image with privacy panels



4 users
[6-A96TRKB2](#) shown



6 users
[6-A144TRKB3](#) shown



8 users
[6-A144TRKB4](#) shown

Static Tri/quad toolrails

Tri toolrail

- For three users, requires three 6-CU-93.5 worksurfaces
- Three 54"w toolrails. End caps on ends (set of six)
- Use with tri worksurface
- Use A model with ¼" material insert, no organizer
- Use B model with 1" material insert, no organizer
- Use C model with shared organizer

Quad toolrail

- For four users, requires four 6-CU-54/54 worksurfaces
- Two 56"w toolrails and two 55.25"W toolrails. End caps on ends, set of four
- Use with quad worksurface
- Use A model with ¼" material insert, no organizer
- Use B model with 1" material insert, no organizer
- Use C model with ¼" material insert and shared organizer
- Use D model with 1" material insert and shared organizer

Tri toolrail



[6-ATRITRKA3](#) ¼" insert
[6-ATRITRKB3](#) 1" insert
[6-ATRITRKC3](#) organizer

Quad toolrail



[6-AQUTRKA4](#) ¼" insert, no storage
[6-AQUTRKB4](#) 1" insert, no storage
[6-AQUTRKC4](#) ¼" insert, with storage
[6-AQUTRKD4](#) 1" insert, with storage

Static Tri/quad worksurfaces

- Diagonal grain
- 22"d worksurface ends
- Use 6-48HBA3 support at ends
- Use tri worksurface with tri toolrail, and quad worksurface with quad toolrail
- Tri worksurface: 93.5"w x 46"d
- Quad worksurface: 54"w x 54"d

Tri worksurface



[6-CU-93.5/46](#)

Quad worksurface



[6-CU-54/54](#)

Static Supports

H leg end support

- Widths: 48"w, 64"w
- Use 48"w with 22"d and 30"d worksurfaces, recesses under worksurface edge on 30"d worksurface
- Use 48"w with tri and quad clusters
- Use 64"w with 30"d or 36"d worksurfaces. Flush to surface edge on 30"d worksurfaces, recesses under 36"d worksurfaces
- H leg support HBA3 used with or without worksurface extension

Double sided center support

- Widths: 30"w, 42"w
- Used to support worksurfaces at seams
- H leg with stretcher, recesses under worksurface
- Use 30"w for 22"d worksurfaces
- Use 42"w for 30"d and 36"d worksurfaces

Tri/quad center support

- Supports center of tri and quad layouts

End support



H leg shown recessed on 30"d worksurface

[6-48HBA3](#)



H leg shown full depth on 30"d worksurface

[6-64HBA3](#)

Middle support



[6-30CHBA1](#) for 22"d worksurface
[6-42CHBA1](#) for 30"/36"d worksurface

Tri support



[6-TCBA](#)

Quad support



[6-QCBA](#)

Static Privacy panels

- Widths: Sizes available from 11.63"w to 83.63"w, refer to specify & price for all available widths
- Heights: 12.8125"h or 18.8125"h
- 1/4" thick privacy panels: Frosted acrylic or glass
- 1" thick privacy panels: TFL, white dry erase laminate, veneer, or fabric
- TFL is horizontal grain, veneer is vertical grain
- Sits inside of toolrail

1" thick privacy panels



12"h TFL/dry erase
[6-PVPT-47.63/12.81](#) shown
 12"h veneer
[6-PVPV-47.63/12.81](#)



18"h TFL/dry erase
[6-PVPT-47.63/18.81](#) shown
 18"h veneer
[6-PVPV-47.63/18.81](#)



12"h fabric
[6-PVPF-47.63/12.81](#) shown



18"h fabric
[6-PVPF-47.63/18.81](#) shown

1/4" thick privacy panels



12"h frosted acrylic
[6-PVPA-47.63/12.81](#) shown



18"h frosted acrylic
[6-PVPA-47.63/18.81](#) shown

Static Toolrail storage

Stanchion bracket

- Used to support toolrail organizers
- Two per package
- Silver finish

Storage general

- Shared organizers, with or without doors
- Depth: 14.5"d
- Height: 15"h
- All widths require two 6-SSS stanchions. **Note:** Stanchions come as pack of two
- Option for doors and backs to be dry erase laminate, frosted glass, or full back painted glass


Alternating openings

- Widths: 36"w, 48"w, 60"w, 72"w
- 36"w has one opening each side on right
- 48"w, 60"w and 72"w has two alternate openings each side

Side openings

- Widths: 48"w, 60"w, 72"w
- Handed left or right
- Two openings at left or right end, each side

Stanchion bracket



6-SSS

Alternating openings



36"w open
[6-3615BSO2A](#)



36"w open
[6-3615BSO2DA](#)



48"w, 60"w, 72"w open
[6-4815BSO4A](#) shown



48"w, 60"w, 72"w doors
[6-4815BSO4DA](#) shown

Side openings



Left open
[6-4815LBSO4C](#) shown



Left doors
[6-4815LBSO4DC](#) shown



Right open
[6-4815RBSO4C](#) shown



Right doors
[6-4815RBSO4DC](#) shown

Static Worksurface storage

- Use to span depth of worksurface. Can be positioned towards user, or facing away
- Widths: 22"w, 30"w, 36"w
- Depth: 13"d (12.25"d opening)
- Heights: 13"h, 19"h
- Finished back
- **Note:** Rests directly on the worksurface

Alternating openings



13"h
[6-2213PSB](#) shown



19"h
[6-2219PSB](#) shown

Static End storage

Storage general

- Widths: 48.125"w, 64.125"w
- Depth: 14"d
- **Note:** Must use with corresponding leg width

End storage box

- Height: 14.125"h
- Can be positioned facing away from user, (above or below worksurface), or facing towards user above worksurface
- Below worksurface use with HSBKT4
- Above worksurface 48"w use with ECBKT4
- Above worksurface 64"w use with ECBKT6

End storage bookcase

- Height: 42"h, rests on floor
- Two adjustable and one stationary shelves per section
- Finished back
- Opens to outside only
- Use with HSBKT4 brackets

End storage box



6-4814ESB shown
Below worksurface



Above worksurface, facing out



Above worksurface, facing in

End storage bookcase



6-4842ESB shown

Static Brackets

Hanging bracket

- Attaches end storage box to side of benching unit
- Set of four

Extension cantilever

- Attaches worksurface extension or storage box to side of benching unit
- Set of four or six. Use ECBKT4 with 48" w storage box. Use ECBKT6 with 64" w storage box
- Black finish only

Hanging bracket



Reference image



[HSBKT4](#)


Extension cantilever



[ECBKT4](#)
Shown on 64" w worksurface extension




[ECBKT6](#)
Shown on 64" w storage box



Cantilever

Static Toolrail infill

- Use to enclose open top edge of toolrail when a privacy panel is not specified
- 120" length
- **Note:** Cut to size during installation

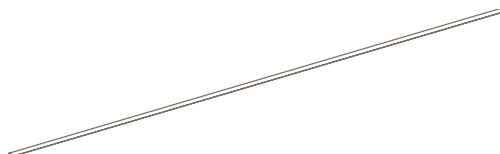

[TRC](#)

Static Floor storage

Mobile pedestals

- Box/file: One box and one file drawer. Available with finished top, or unfinished top for cushion
- Shelf/file: One file drawer and open shelf behind full drawer front. Finished top only, can be used with cushion

Low height floor storage

- Widths: 48"w, 60"w
- Depth: 19"d
- Height: 23"h, with or without riser support
- Box drawer on low storage with no riser, tray drawer on low storage with riser
- Handed left or right, file drawer location determines hand

Low height floor storage, continued

- 48"w storage features 30"w lateral file
- 60"w storage features 36"w lateral file
- One adjustable shelf
- Optional felt top
- Optional cushion specified separately

Low storage cushions

- Widths: 30"w, 36"w, 48"w, 60"w
- Depth: 19"d
- Height: 1.5"h
- Field installed


Mobile pedestals



Box/file
6-1619MP7 Unfinished top
6-1619MP8 Finished top



Shelf/file
6-1619MP3



Shelf/file interior



Cushion top
6-1619SC2

Low storage



No riser support
[6-NL4819FSR](#) shown



With riser support
[6-RL4819FSR](#) shown

Low storage cushions



[6-3019SC](#) shown
[6-3619SC](#)



[6-4819SC](#) shown
[6-6019SC](#)

Static Power kits, 3 circuit/5 wire

- Includes metal conduit jumper to connect each power block. Tri power kit includes Y connector
- One double block system per dual sided user on double sided toolrails. Tri power kit includes two three power blocks, quad includes two power blocks
- Power blocks accept two duplexes each side, includes toolrail brackets
- Economy or premium power available. Premium power includes faceplates
- **Note:** Infeed and duplex receptacles specified separately

Double sided economy power kits



Four users
[PS-96PK3E4-4](#) shown



Six users
[PS-144PK3E6-4](#) shown



Eight users
[PS-192PK3E8-4](#) shown

Double sided premium power kits



Four users
[PS-96PK3A4-4](#) shown



Six users
[PS-144PK3A6-4](#) shown



Eight users
[PS-192PK3A8-4](#) shown

Tri power kits



Economy power kit
[PS-TRPK3E3-8](#)



Premium power kit
[PS-TRPK3A3-8](#)

Quad power kits



Economy power kit
[PS-QUPK3E4-4](#)



Premium power kit
[PS-QUPK3A4-4](#)

Static Power kits, 4 circuit/8 wire

- Includes metal conduit jumper to connect each power block. Tri power kit includes Y connector
- One double block system per user on double sided toolrails
- Power blocks accept two duplexes each side, includes toolrail brackets
- Economy or premium power available. Premium power includes faceplates
- **Note:** Infeed and duplex receptacles specified separately

Double sided economy power kits



Four users
[PS-96PK4E4-4](#) shown



Six users
[PS-144PK4E6-4](#) shown



Eight users
[PS-192PK4E8-4](#) shown

Double sided premium power kits



Four users
[PS-96PK4A4-4](#) shown



Six users
[PS-144PK4A6-4](#) shown



Eight users
[PS-192PK4A8-4](#) shown

Tri power kits



Economy power kit
[PS-TRPKE3-8](#)



Premium power kit
[PS-TRPK4A3-8](#)

Quad power kits



Economy power kit
[PS-QUPK4E4-4](#)




Premium power kit
[PS-QUPK4A4-4](#)


Static Power kits, Chicago power

- Does not include electrical components
- Double sided housing kits and power block assembly - four outlets each user
- Tri cluster housing kits: Eight outlets each user
- J-box includes nuts and bolts to install on toolrail
- Use PS-PKCC4-4 with quad toolrail


Double sided housing kits

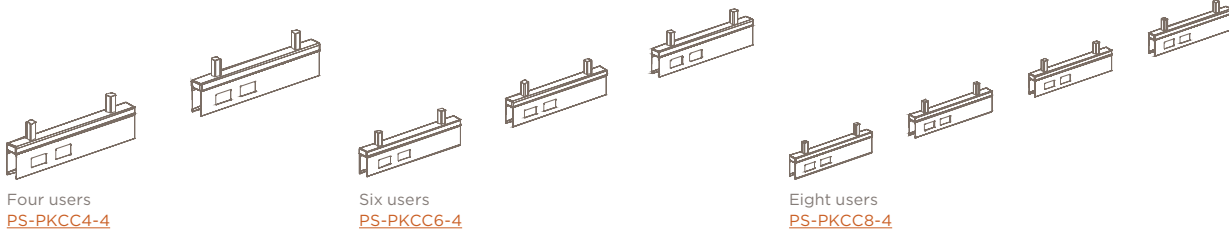


Tri cluster housing kit

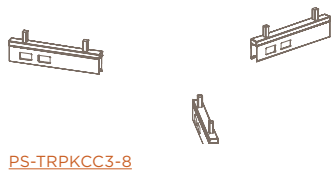

J-box



Power block assembly



Static Wire management


Vertical wire manager

- For heavy duty cabling
- Includes hardware that attaches to the toolrail, or underside of a surface

Wire basket kits


- Double sided baskets available for all toolrail widths in sets of one, two, three and four. Refer to specify & price for all configurations
- Attaches to toolrail. **Note:** Not for use with single sided toolrails
- Tri cluster kit includes three baskets
- Quad cluster kit includes four baskets

Vertical wire manager




[VCWM5](#)


Wire basket kit

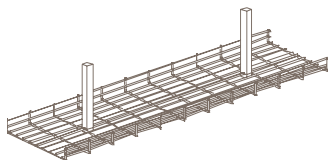

Double sided
[WM-96CBKT-2](#) four user reference
[WM-144CBKT-2](#) six user reference
[WM-192CBKT-2](#) eight user reference

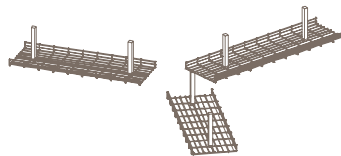

Tri cluster
[WM-TRCBKT-3](#)

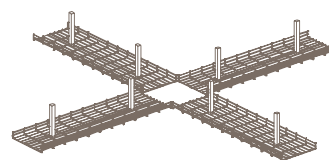

Quad cluster
[WM-QUCBKT-4](#)

Height adjustable Worksurfaces

- Surface widths: 54"w, 60"w, 66"w, 72"w
- Depth: 30"d
- Long grain, square edge
- Use with height adjustable bases
- Includes height adjustable control, switch and cables



6-5430HAWs shown

Height adjustable Storage bases

- For single sided applications only
- Use end base at ends of runs, use middle base in middle of user run
- Handed left or right
- Widths: 62"w, 68"w, 74"w
- Open section with adjustable shelf
- Box/file (62"w, 68"w), or box/lateral (74"w)
- Must be ordered with height adjustable worksurfaces
- Includes cutouts for mounting cross rail on lifting column sides
- Removable access panel
- Finished back standard on TFL
- **Note:** Cross rail is required to support bases

End storage bases



Box/file
6-6218HAFSR1E-3 right base (shown)
6-6218HAFSL1E-3 left base



Box/lateral
6-7418HAFSR4E-3 right base (shown)
6-7418HAFSL4E-3 left base

Middle storage bases

right shown



Box/file
6-6218HAFSR1M-3 right base (shown)
6-6218HAFSL1M-3 left base



Box/lateral
6-7418HAFSR4M-3 right base (shown)
6-7418HAFSL4M-3 left base

Height adjustable Panel | cabinet bases

General

- Must be ordered with height adjustable worksurfaces and cross rails
- Removable interior access panel
- Includes cutouts for mounting cross rail on lifting column sides
- Single user components feature finished back on exterior side
- **Note:** Cross rail is required to support bases

End panel bases

- Use at end of runs for thinner profile
- Use without low floor storage

End cabinet bases

- Use at ends of runs, with or without floor storage

Center cabinet bases

- Use with at center of worksurface run, single or dual sided, with or without floor storage

End panel bases



Single user
[6-3207HAWCL1-3](#) left base
[6-3207HAWCR1-3](#) right base



Dual sided user
[6-4207HAWC1-3](#)

End cabinet bases



Single user, left or right panel base
[6-3218HAWCL3-3](#) left base
[6-3218HAWCR3-3](#) right base



Double sided user
[6-4218HAWC3-3](#)

Center cabinet bases



Single side, dual user
[6-3218HAWCL2-3](#) left base
[6-3218HAWCR2-3](#) right base



Double side, dual user
[6-4218HAWC2-3](#)

Height adjustable Cross rails

Cross rail back

- Widths: 40"w, 46"w, 52"W, 58"w
- Covers electrical components on approach of single sided typical, attaches to underside of cross rail
- Use with cross rails, with or without power

Cross rail general

- **Note:** Cross rail is required to support bases
- Widths: For worksurface widths 54"w, 60"w, 66"w, 72"w. Actual cross rail width is 6" shorter than worksurface width, sits between bases
- Depth: 6"d
- Supports power, privacy screens and PET baskets
- Use with single and double sided height adjustable panel and cabinet bases
- Option to pre-bore holes to mount privacy screens on double sided cross rails
- Does not include duplex receptacles, jumpers or in-feeds

No power

- Does not support power
- Use with single or double sided layouts

Economy/premium power

- **Note:** Use with 4 circuit/8 wire power components only
- Includes power box and mounting brackets
- Premium power includes faceplates
- Single sided features two duplex boxes on one side, four outlets total
- Double sided features two duplex boxes on both sides, four outlets total per side

Chicago power

- One power block assembly with outlet boxes and face plates
- Four outlets each user, receptacles not included
- Hardwired on site

Cross rail back



[6-54PRB-BACK](#) shown

No power



[6-54PRB](#) shown

Economy power



Single sided
[6-54PRSSB-4](#) shown



Dual sided
[6-54PRB-4](#) shown

Premium power



Single sided
[6-54PRSSA-4](#) shown



Dual sided
[6-54PRA-4](#) shown

Chicago power



Single sided
[6-54PRSSC-4](#) shown



Dual sided
[6-54PRC-4](#) shown

Height adjustable Floor storage

Open floor storage

- Widths: 42"w, 48"w
- 30"w larger opening
- Smaller opening is 12"w on 42"w storage, and 18"w on 48"w storage
- Handed left or right. 30"w opening location determines hand
- One adjustable shelf each section
- Finished back

File drawer floor storage

- 30"w and 36"w features one box and one file drawer
- 42"w and 48"w features a 30"w box and lateral file drawer
- Smaller opening is 12"w on 30"w and 42"w storage, and 18"w on 36"w and 48"w storage
- Handed left or right. File drawer location determines hand
- One adjustable shelf in open section
- Open shelf or box drawer above file drawer
- Finished back

Floor storage

right hand shown



42"w
6-4218FS(L/R)5



48"w
6-4818FS(L/R)5

Floor storage



30"w
6-3018FSR2 shown



36"w
6-3618FSR2 shown



42"w
6-4218FSR4 shown



48"w
6-4818FSR4 shown

Floor storage



30"w
6-3018FSR1 shown



36"w
6-3618FSR1 shown



42"w
6-4218FSR3 shown



48"w
6-4818FSR3 shown

Height adjustable Floor storage cushions

Rectangle storage cushion

- Widths: 30"w, 36"w, 42"w, 48"w
- Depth: 18"d
- Height: 1.5"h
- Field installed

Round storage cushion

- 16x16 diameter
- Height: 1.5"h
- Does not secure to storage top, rests on surface.
- Anti slip material on underneath of cushion to keep cushion securely in place

Rectangle cushion



[6-3018SC](#)
(shown on 42"w storage)



[6-3618SC](#)



[6-4218SC](#)
[6-4818SC](#) shown

Round cushion



[6-16RSC](#)
(shown on 30"w storage)

Height adjustable Privacy screens

Worksurface edge modesty general

- Available as TFL (horizontal grain), veneer (vertical grain), frosted acrylic, or fabric (tackable)


Single sided user

- Height: 23.75"h
- Widths: 40"w, 46"w, 52"w and 58"w (for 54"w, 60"w, 66"w and 72"w worksurfaces)

Single or double sided user

- Height: 16.5"h **Note:** modesty is shorter to avoid interference with cross rail on double sided layout
- Widths: 52"w, 58"w, 64"w and 70"w (for 54"w, 60"w, 66"w and 72"w worksurfaces)
- Requires four brackets
- Leaves a 1.5"w gap between modesty panel and worksurface edge for wire management


Worksurface edge modesty Single sided only



Fabric
[6-WEMFH-40/23.75](#) shown



TFL
[6-WEMKH-40/23.75](#) shown

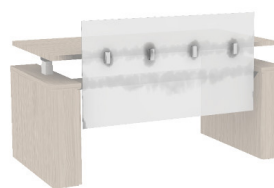

Frosted acrylic
[6-WEMAH-40/23.75](#) shown



Veneer
[6-WEMWH-40/23.75](#) shown


Worksurface edge modesty Single or double sided



Fabric
[6-WEMFH-52/16.5](#) shown



TFL
[6-WEMKH-52/16.5](#) shown

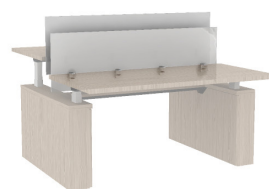


Frosted acrylic
[6-WEMAH-52/16.5](#) shown




Veneer
[6-WEMWH-52/16.5](#) shown

Height adjustable Privacy screen brackets


- Use WEBKT-1 for acrylic edge worksurface modesty panels
- Use WEBKT-2 for TFL and veneer edge worksurface modesty panels
- Use WEBKT-3 for fabric edge worksurface modesty panels



Fabric panel bracket
[WEBKT-1](#)



TFL panel bracket
[WEBKT-2](#)



Fabric panel bracket
[WEBKT-3](#)

Height adjustable Cross rail privacy screen

- For double sided applications, tackable fabric only
- Height: 25"h, sits .5" above cross rail
- Widths: 52"w, 58"w, 64"w and 70"w (for 54"w, 60"w, 66"w and 72"w worksurfaces)
- Mounts directly to cross rail, includes post brackets. Option to pre-bore holes on cross rail



[6-5225PP](#) shown

Height adjustable Wire management

Cross rail mounted

- PET wire manager
- Mounts to underside of cross rail, includes mounting hardware
- Widths:
 - 32"w (for 54"w worksurface)
 - 44"w (for 60"w and 66"w worksurface)
 - 56"w (for 72"w worksurface)
- Use highback PET on single sided units to cover electrical on approach side. Not for use with cross rail privacy panel
- Use shared PET on single and double sided typicals

PET wire manager tray

- Widths: 32"w, 44"w, 56"w, 68"w
- Mounts to underside of worksurface

Wire basket

- Widths: 33"w, 45"w, 57"w
- Mounts to underside of worksurface
- Field installed

Height adjustable wire manager

- Manages cables between height adjustable worksurface and cross rail. Attaches to underside of worksurface and cross rail
- WM-HA2 - black/silver combination
- WM-HA3 - silver/silver combination
- WM-HA4 - black/black combination
- WM-HA5 - white/white combination

Cross rail mounted



Highback PET (approach side shown)
[WM-P32CRB](#) shown




PET on single sided
[WM-P32CR](#) shown




PET on double sided
Use same model as shown on single sided

PET tray

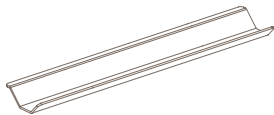


[WM-P32](#) shown

Wire basket

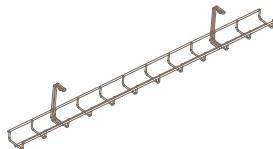

[WBT33H](#) shown

Height adjustable wire manager




[WM-HA2](#) shown

Electrical components 3 circuit/5 wire


- **Note:** Not used with height adjustable benching. See 4 circuit/8 wire components
- Infeed options include: Liquid tight, metal, NYC code and plug and play. Liquid and metal infeeds are 10' long, NYC code and plug and play infeeds are 6' long. **Note:** Plug and play infeed limits system, must use all circuit I duplexes
- Power jumper used to connect power blocks, metal conduit. Widths available from 8"w to 84"w
- Y connector used to connect power infeed to any jumper junction and power block
- Power blocks are double sided and house duplex receptacles
- Power block bracket mounts power block to underside of toolrail, one bracket for single blocks, two brackets for double blocks
- Premium power block mounts to toolrail, can be placed anywhere along toolrail. Includes power block and faceplates only
- Duplexes available in circuit I, II and III



Hardwired infeed -
liquid tight or metal
[PWF5L120](#) / [PWF5M120](#)




Hardwired infeed - NYC
[PWF5NYC](#)




Plug and play infeed
[PWF5M20AMP](#)




Power jumper
[MCJ5W36M](#) shown




Y connector
[YCB5](#)




Single power block,
double sided
[PB5S1](#)




Double power block,
double sided
[PB5D1](#)



Extended double power
block, double sided
[DPB5S24](#) shown



Power block bracket
[PBBKTA2](#)



Duplex
[DPX5W1](#) shown

Electrical components 4 circuit/8 wire

Title 24

- Duplexes with 15 amp circuit for Title 24 power requirements. Circuits I, II, III, or IV (isolated and dedicated)

Static components

- Double block system is 28" w. Power blocks are double sided, receives four duplex receptacles
- Power block bracket mounts power block to underside of toolrail, one bracket for single blocks, two brackets for double blocks
- Premium power block is 21" w. Single power block is double sided, receives two duplex receptacles


Height adjustable components

- Power block bracket mounts power block to underside of worksurface. One bracket for single blocks, two brackets for double blocks

Shared components

- Infeed options include: Liquid tight, metal, NYC code, plug and play and rotating Liquid and metal infeeds are 10' long, NYC code and plug and play infeeds are 6' long. Rotating infeed is a quick disconnect wall outlet, allowing cords to be removed from wall when hardwiring, **Note:** Plug and play infeed limits system, must use all circuit I duplexes
- Power jumper is used to connect power blocks. Refer to specify & price for available jumper lengths
- Duplexes available in circuit I, II, III and IV
- Jumper connector allows connection of two jumpers
- H block allows connection of up to four jumpers
- Power blocks are single or double sided, and are available as single or double wide

Title 24




Title 24 duplex
[DPX8WCT1](#) shown

Static components




Double block system
[DPBS28](#)



Power box bracket
[PBBKTA2](#)

Height adjustable components




Power box bracket
[PBBKT1](#)

Shared components




Hardwired infeed -
Liquid Tight or metal
[PWF3L120](#) / [PWF3M120](#)



Hardwired infeed - NYC
[PWF3NYC](#)




Plug and play infeed
[PWF3M20AMP](#)




Rotating infeed
[PWF3QD](#)



Power jumper
[MCJ8W__M](#)




Duplex
[DPX8W_](#)




Jumper connector
[JC-2](#)




H Block
[HCB](#)




Power block,
single half (1 duplex)
[PHBS1](#)



Power block,
single (2 duplexes)
[PBS1](#)



Power block,
double half (2 duplexes)
[PHBD1](#)



Power block,
double (4 duplexes)
[PBD1](#)