




T200022

Footprint: 20' x 12'



carolina
an OFS company

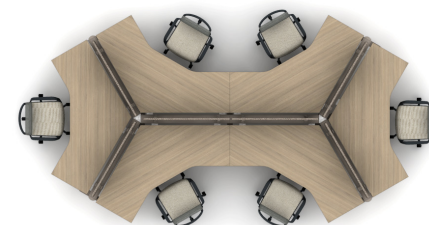

#	Qty	Company	Catalogue	Part Number	Description
1	6	OFS	OST	114015	Marco, 26x27x38, Swivel Chair with 5 star high arch base with casters
2	1	OFS	OAG	A-48CA	Agile, 49.5x4.625x26.75 Configurable Add-On Unit
3	3	OFS	OAG	A-48CS	Agile, Configurable Unit, 49.5x18x26.75
4	2	OFS	OAG	A-48S	Agile, Starter Unit, 51x18x26.75
5	2	OFS	OAG	A-CKT120	Agile, Connector Kit, Used to Assemble 120 Degree Configuration
6	6	OFS	OAG	A-CU-4848T	Agile, 48x48x1, 120 Degree Corner Unit Worksurface (Diagonal Grain)
7	10	OFS	OAG	A-L2S	Agile, 2" Square Metal Base
8	6	OFS	OAG	A-MEC	Agile, Modular End Cap
9	6	OFS	OAG	A-PVPF-4614S	Agile, Fabric Privacy Panel 46x0.75x14.125, Square Corners
10	22	OFS	OAG	A-WBKT	Agile, Worksurface Bracket
11	2	OFS	OAC	CP-1	4 x 4 Clamp Plate
12	6	OFS	OAC	DPX8WC1	20 Amp Circuit I Duplex Receptacle, For Use with Eight Wire Four Circuit System
13	6	OFS	OAC	DPX8WC2	20 Amp Circuit II Duplex Receptacle, For Use with Eight Wire Four Circuit System
14	6	OFS	OAC	DPX8WC3	20 Amp Circuit III Duplex Receptacle, For Use with Eight Wire Four Circuit System
15	6	OFS	OAC	DPX8WC4	20 Amp Circuit IV (Isolated & Dedicated) Duplex Receptacle, For Use with Eight Wire Four Circuit System
16	1	OFS	OAC	MCJ8W38M	38" Ganging Jumper, use w/ 8-wire 4-circuit system
17	1	OFS	OAC	MCJ8W41M	Power Jumper For 48" Configurable Connection, 48" to 54" Straight Run Connection, 54" to 60", 66", or 72" Configurable Connection to Two Duplex Units, for Eight-Wire Metal Conduit
18	1	OFS	OAC	PWF3L120	8-wire electrical system, Power In-Feed, Liquid Tight Conduit